


ELECTRICAL CHARACTERISTICS

NOMINAL VOLTAGE	12 V
NOMINAL CAPACITY	600 Ah
NOMINAL ENERGY	6240 Wh
MAXIMUM CONTINUOUS AVERAGE CURRENT	250 mA
MAXIMUM INTERMITTENT DISCHARGE CURRENT (Discharge rate < 1')	1000 mA
MAXIMUM PULSE DISCHARGE CURRENT (Discharge rate < 1')	2000 mA
MAXIMUM CAPACITY USABLE PER HOUR FOR INTERMITTENT AND PULSE DISCHARGE	185 mAh

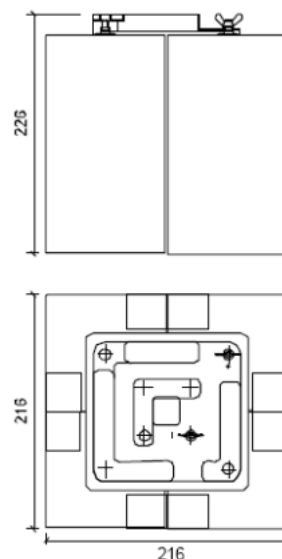

PHYSICAL CHARACTERISTICS

DIMENSIONS	
Length	216 mm
Width	216 mm
Height	226 mm
NET WEIGHT	16,5 Kg
VOLUME	10,5 dm ³
CASE MATERIAL	Plastic*
TERMINALS	Nº 1
GUARANTEED SHELF LIFE	2 YEARS
MERCURY CONTENT	None
CADMIUM CONTENT	None


CAPACITY				
USE	CONDICIONES			MINIMUM AVERAGE CAPACITY (Ah)
	Resistance (Ω)	Daily period	End Point (V)	
FAST	48	24 H	7,2	582
NORMAL	96	14 H	7,2	582

- High impact polystyrene.

TYPICAL HEAVY SERVICE DISCHARGE / COURBE DE DÉCHARGE POUR RÉGIME FORT

48 Ω - 24 HOURS / DAY - CUT OFF 7,2 VOLTS


48 Ω - 24 HEURES / JOUR - TENSION D'ARRÊT 7,2 VOLTS

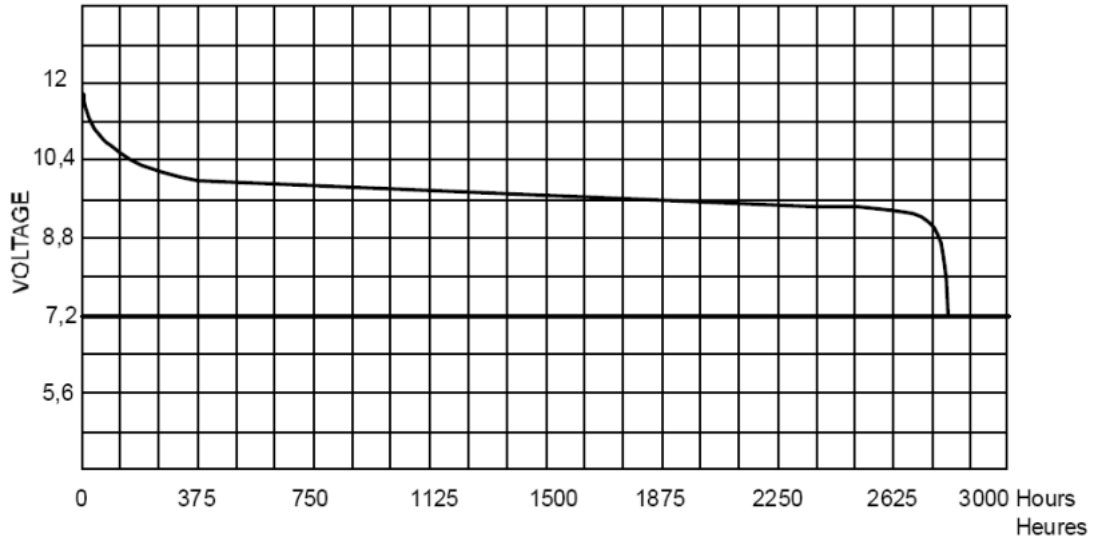


TYPICAL LIGHT SERVICE DISCHARGE / COURBE DE DÉCHARGE POUR RÉGIME LENT

96 Ω - 14 HOURS / DAY - CUT OFF 7,2 VOLTS

96 Ω - 14 HEURES / JOUR - TENSION D'ARRÊT 7,2 VOLTS

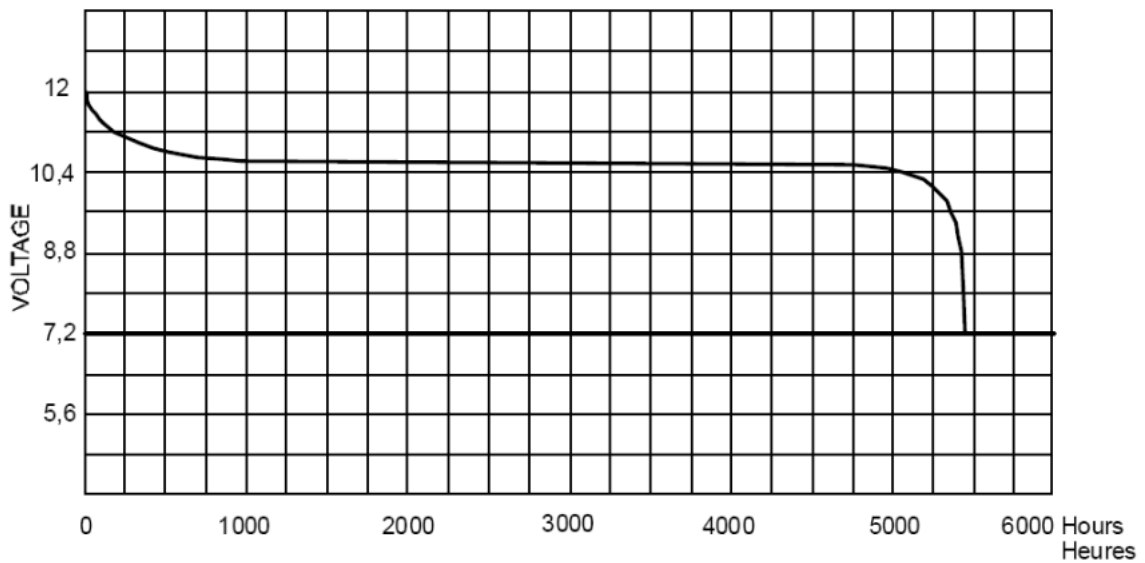

CAPACITY AS A FUNCTION OF TEMPERATURE AND DUTY
CAPACITÉ EN FONCTION DE LA TEMPÉRATURE ET DU RÉGIME

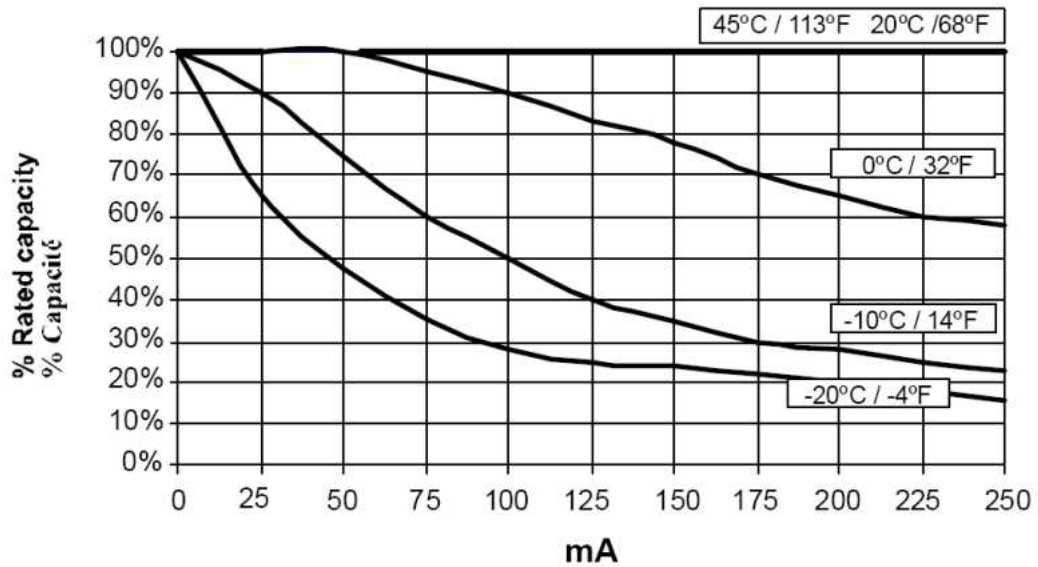

CAPACITY AS A FUNCTION OF SHELF LIFE
CAPACITÉ EN FONCTION DE LA CONSERVATION

YEARS ANNÉES	CAPACITY CAPACITÉ Ah
1	570
2	552