


ELECTRICAL CHARACTERISTICS

NOMINAL VOLTAGE	9 V
NOMINAL CAPACITY	120 Ah
NOMINAL ENERGY	940 Wh
MAXIMUM CONTINUOUS AVERAGE CURRENT	50 mA
MAXIMUM INTERMITTENT DISCHARGE CURRENT (Discharge rate < 1')	200 mA
MAXIMUM PULSE DISCHARGE CURRENT (Discharge rate < 1'')	400 mA
MAXIMUM CAPACITY USABLE PER HOUR FOR INTERMITTENT AND PULSE DISCHARGE	38 mAh

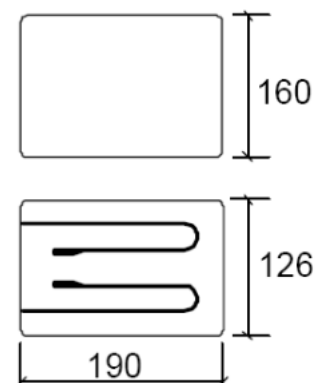

PHYSICAL CHARACTERISTICS

DIMENSIONS	
Length	190 mm
Width	126 mm
Height	160 mm
NET WEIGHT	2,8 Kg
VOLUME	3,83 dm ³
CASE MATERIAL	Plastic *
TERMINALS	Nº 4
GUARANTEED SHELF LIFE	2 YEARS
MERCURY CONTENT	None
CADMIUM CONTENT	None


USE	CAPACITY			
	CONDICIONES			MINIMUM AVERAGE CAPACITY (Ah)
	Resistance (Ω)	Daily period	End Point (V)	
FAST	240	24 H	5,4	116
NORMAL	400	24 H	5,4	116

* High impact polystyrene.

TYPICAL HEAVY SERVICE DISCHARGE / COURBE DE DÉCHARGE POUR RÉGIME FORT

240 Ω - 24 HOURS / DAY - CUT OFF 5,4 VOLTS


240 Ω - 24 HEURES / JOUR - TENSION D'ARRÊT 5,4 VOLTS

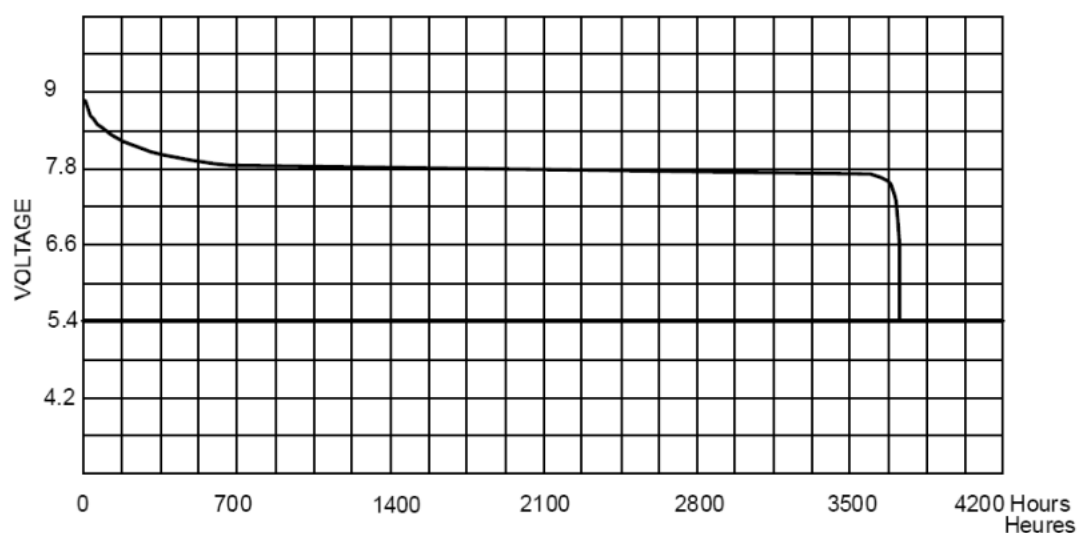


TYPICAL LIGHT SERVICE DISCHARGE / COURBE DE DÉCHARGE POUR RÉGIME LENT

400 Ω - 24 HOURS / DAY - CUT OFF 5,4 VOLTS

400 Ω - 24 HEURES / JOUR - TENSION D'ARRÊT 5,4 VOLTS

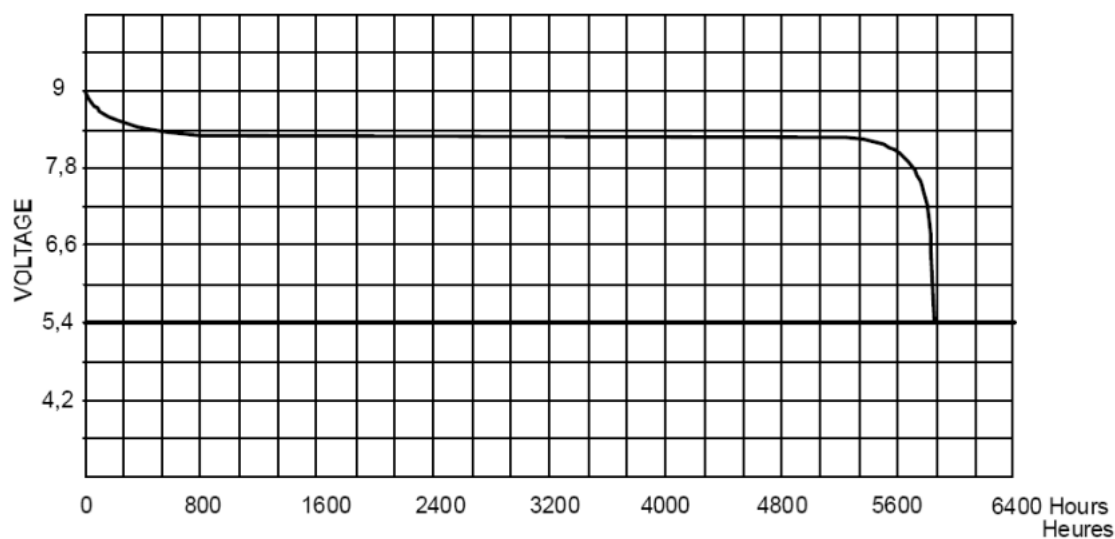

CAPACITY AS A FUNCTION OF TEMPERATURE AND DUTY
CAPACITÉ EN FONCTION DE LA TEMPÉRATURE ET DU RÉGIME

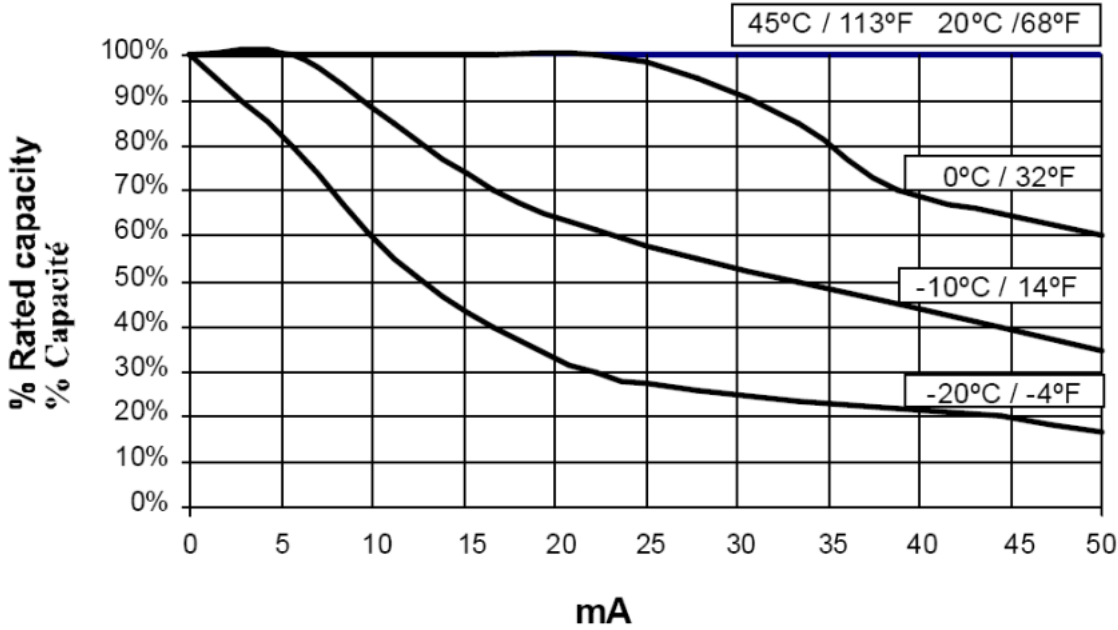

CAPACITY AS A FUNCTION OF SHELF LIFE
CAPACITÉ EN FONCTION DE LA CONSERVATION

YEARS ANNÉES	CAPACITY CAPACITÉ Ah
1	114
2	110